

**4A 650V SiC Schottky Diode**
**■ Applications**

- Switch Mode Power Supply
- Power Factor Correction
- Solar Inverter
- Uninterruptible Power Supply

**■ Features**


- No Reverse Recovery/ No Forward Recovery
- Temperature Independent Switching Behavior
- Positive Temperature Coefficient on  $V_F$
- Fast Reverse Recovery
- High Surge Current Capability
- 100% UIS and RG Tested

**■ Product Summary**

$V_{RRM}$	650	V
$I_F@T_c=150^\circ\text{C}$	4	A
$V_{F,TYP}@T_c=25^\circ\text{C}$	1.5	V
$V_{F,TYP}@T_c=175^\circ\text{C}$	1.8	V
$Q_c$	8.5	nC

**■ Benefits**

- Higher System Efficiency
- System Cost and Size Savings
- High Frequency Operation
- Higher System Reliability
- Reduced EMI

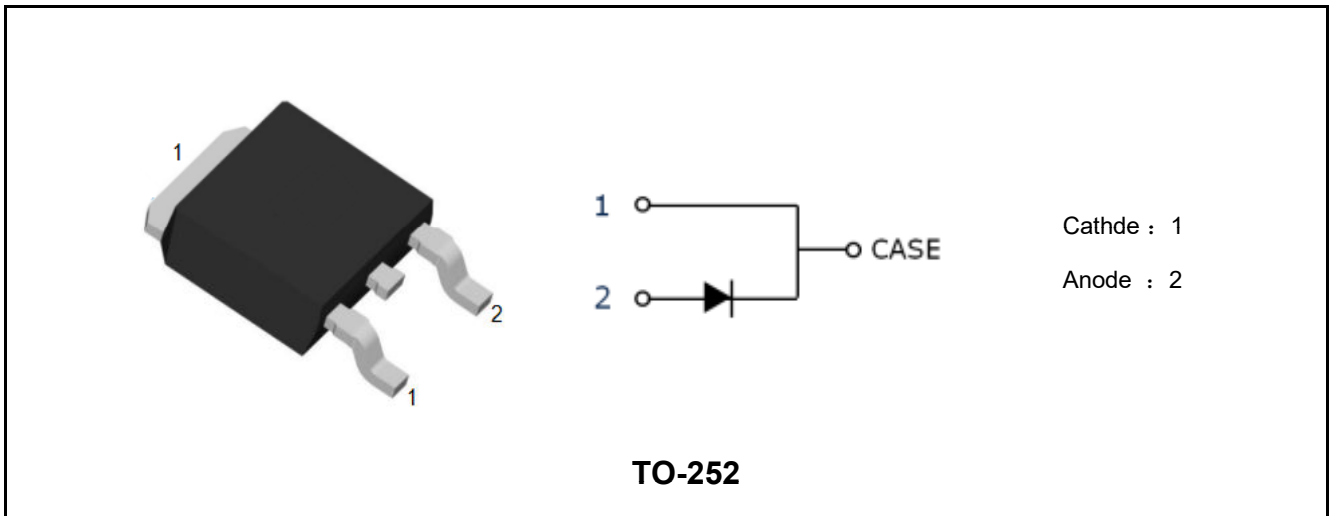

Marking	Package	Packaging	Min. package quantity
MK3S04C065	TO-252	Tape & Reel	3000



**■ Absolute Maximum Ratings (Tc=25°C unless otherwise noted)**

Parameter	Symbol	Ratings	Unit
Peak Repetitive Reverse Voltage	$V_{RRM}$	650	V
Surge Peak Reverse Voltage	$V_{RSM}$	650	V
DC Peak Blocking Voltage	$V_R$	650	V
Continuous Forward Current	$I_F$	4	A
Non-Repetitive Peak Forward Surge Current	$I_{FSM}$	35	A
Power Dissipation	$P_D$	50	W
Junction Temperature	$T_J$	175	°C
Storage Temperature	$T_{stg}$	-55-175	°C






**■ Thermal Characteristics**

Parameter	Symbol	Max	Unit
Maximum Junction-to-Case	$R_{\theta JC}$	3	°C/W
Maximum Junction-to-Ambient	$R_{\theta JA}$	60	°C/W

**■ Electrical Characteristics (Tc=25°C unless otherwise noted)**

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
<b>Static Parameters</b>						
DC Blocking Voltage	$V_{DC}$	$I_R=100\mu A$	650	-	-	V
Forward Voltage	$V_F$	$I_F=4A$	-	1.5	1.7	V
		$I_F=4A, T_J=175^\circ C$	-	1.8	2.3	V
Reverse Current	$I_R$	$V_R=650V$	-	0.5	10	$\mu A$
		$V_R=650V, T_J=175^\circ C$	-	10	50	$\mu A$
<b>AC Parameters</b>						
Total Capacitive Charge	$Q_C$	$I_F=4A, di/dt=500A/\mu s, V_R=400V, T_J=25^\circ C$	-	8.5	-	nC
Total Capacitive	C	$V_R=1V, f=1MHz$	-	135	-	pF
		$V_R=200V, f=1MHz$	-	17	-	
		$V_R=400V, f=1MHz$	-	16	-	

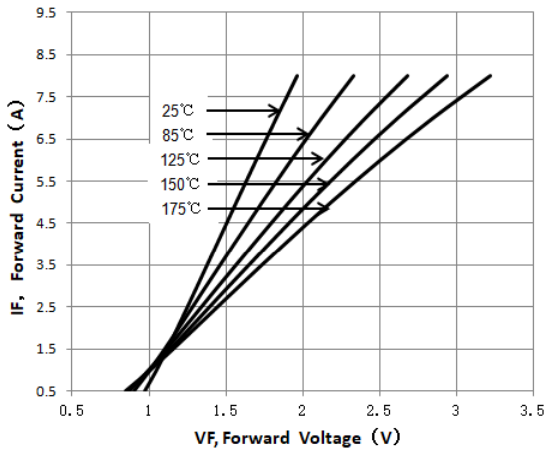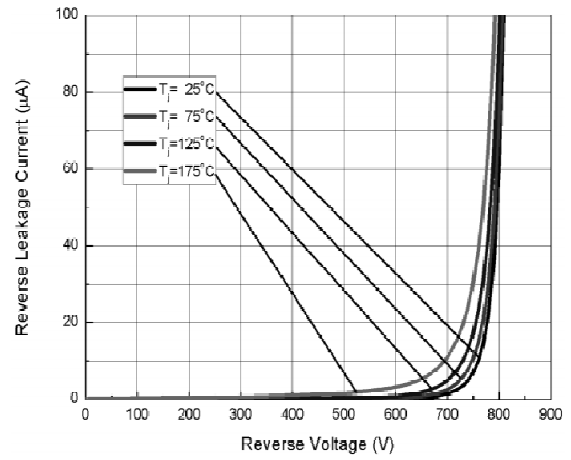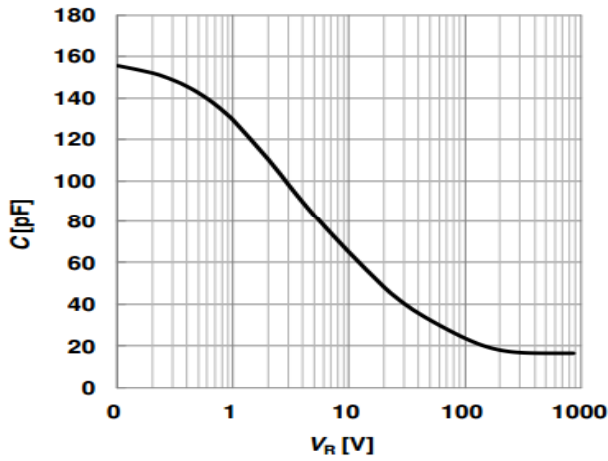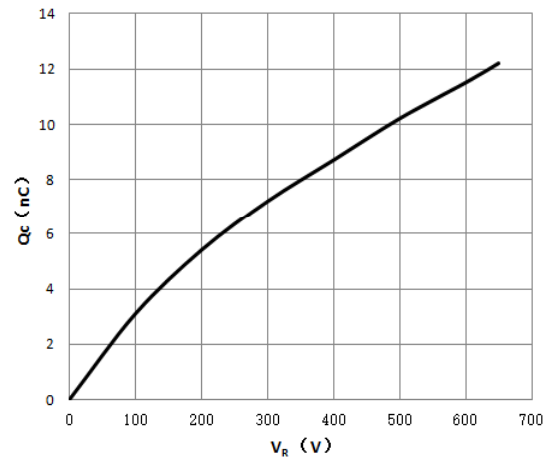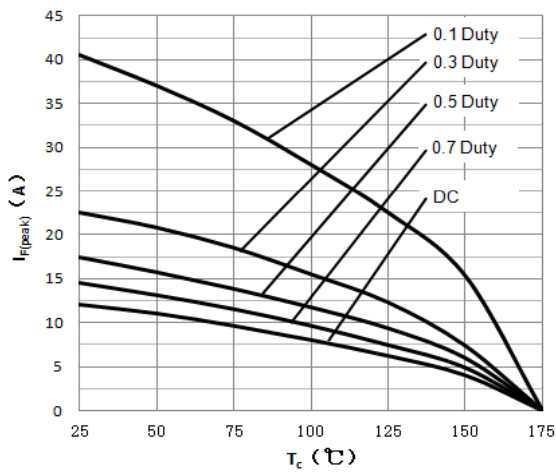

**Characteristics Curves**

**Forward Characteristics**

**Reverse Characteristics**

**Capacitance**

**Recovery Charge vs. Reverse Voltage**

**Current Derating**




TO-252 Package Dimensions

Unit: mm

Symbol	Min	Nom	Max	Symbol	Min	Nom	Max
A	2.10		2.50	E	5.80		6.30
B	0.80		1.25	e1	2.25	2.30	2.35
b	0.50		0.85	e2	4.45		4.75
b1	0.50		0.90	L1	9.50		10.20
b2	0.45		0.60	L2	0.90		1.45
C	0.45		0.60	L3	0.60		1.10
D	6.35		6.75	K	-0.1		0.10
D1	5.10		5.50				

