

■ Applications


- Inverter
- Welding converters
- Power Factor Correction (PFC)
- Uninterruptible Power Supply (UPS)
- Converters with high switching frequency

■ Features

- Low $V_{CE(sat)}$
- High speed switching
- High ruggedness, temperature stable
- Positive temperature coefficient in $V_{CE(sat)}$
- Enhanced avalanche capability
- RoHS and Halogen-Free Compliant

■ Product Summary

V_{CES}	650	V
I_C	120	A
$V_{CE(sat)}, Typ@15V$	1.7	V

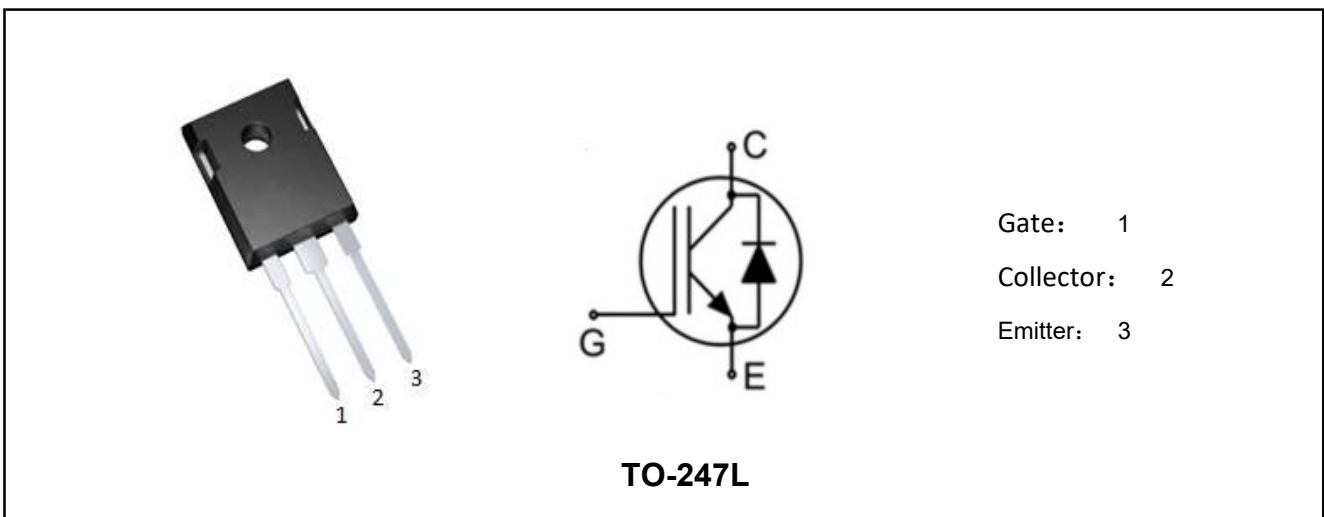

Marking	Package	Packaging	Min. package quantity
MSLB120N065J2H	TO-247L	Tube	450





■ Absolute Maximum Ratings (Tc=25°C unless otherwise noted)

Parameter	Symbol	Ratings	Unit
Collector-emitter Voltage	V_{CES}	650	V
DC collector current, limited by T_{jmax} TC=25°C TC=100°C	I_C	140 120	A
Pulsed collector current, tp limited by T_{jmax}	$I_{C\ Pulse}$	480	A
Diode forward current, limited by T_{jmax} TC=25°C TC=100°C	I_F	140 120	A
Diode Pulsed current, tp limited by T_{jmax}	$I_{F\ Pulse}$	480	A
Continuous Gate-emitter voltage	V_{GE}	±20	V
Power Dissipation (TC=25°C)	P_D	395	W
Junction Temperature	T_j	175	°C
Storage Temperature	T_{STG}	-55-150	°C

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.

■ Thermal Characteristics

Parameter	Symbol	Max	Unit
IGBT Maximum Junction-to-Case	$R_{\theta JC}$	0.38	°C/W
Diode Maximum Junction-to-Case	$R_{\theta JC}$	0.36	°C/W
Maximum Junction-to-Ambient	$R_{\theta JA}$	40	°C/W

Note: This transistor is sensitive to electrostatic discharge and should be handled with care.





■ Electrical Characteristics (Tc=25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	BV_{CES}	$V_{GE}=0V, I_C=250\mu A$	650	-	-	V
Zero gate voltage collector current	I_{CES}	$V_{CE}=650V, V_{GE}=0V$	-	-	50	μA
Gate-emitter leakage current	I_{GES}	$V_{GE}=\pm 20V, V_{CE}=0V$	-	-	± 200	nA
Gate-emitter threshold voltage	$V_{GE(TH)}$	$V_{CE}=V_{GE}, I_C=250\mu A$	4	4.6	6	V
Collector-emitter saturation voltage	$V_{CE(sat)}$	$V_{GE}=15V, I_C=120A$	-	1.7	2	V
		$T_j=150^\circ C$	-	2.1	-	V
Diode forward voltage	V_F	$I_F=120A$	-	1.9	2.3	V
		$T_j=150^\circ C$	-	1.7	-	V
Dynamic Characteristics						
Input Capacitance	C_{ies}	$V_{CE}=25V, V_{GE}=0V,$ $f=1.0MHz$	-	4250	-	pF
Output Capacitance	C_{oes}		-	300	-	pF
Reverse Transfer Capacitance	C_{res}		-	100	-	pF
Integrated gate resistor	R_{Gint}		-	2.4	-	Ω
Total Gate Charge	Q_g	$V_{CC}=400V, I_C=25A,$ $V_{GE}=15V$	-	170	-	nC
Gate-to-emitter charge	Q_{ge}		-	23	-	nC
Gate-to-collector charge	Q_{gc}		-	65	-	nC
Internal emitter inductance measured 5mm (0.197 in.) from case	L_E		-	13	-	nH





■ Switching Characteristic, Inductive Load, at $T_j=25^\circ\text{C}$

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
IGBT Switching Characteristics						
Turn-On Delay Time	$t_{d(on)}$	$V_{CC}=400V, I_C=120A,$ $V_{GE}=0/15V, R_g=10\Omega$ Inductive load	-	58	-	ns
Turn-On Rise Time	t_r		-	70	-	ns
Turn-Off Delay Time	$t_{d(off)}$		-	205	-	ns
Turn-Off Fall Time	t_f		-	100	-	ns
Turn-on energy	E_{on}		-	1.44	-	mJ
Turn-off energy	E_{off}		-	3	-	mJ
Body Diode Characteristics						
Reverse Recovery Time	t_{rr}	$V_R=400V, I_F=25A,$ $di/dt=500A/us$	-	65	-	ns
Reverse Recovery Charge	Q_{rr}		-	0.74	-	μC
Peak Reverse Recovery Current	I_{rrm}		-	23	-	A


■ Switching Characteristic, Inductive Load, at $T_j=150^\circ\text{C}$

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
IGBT Switching Characteristics						
Turn-On Delay Time	$t_{d(on)}$	$V_{CC}=400V, I_C=120A,$ $V_{GE}=0/15V, R_g=10\Omega$ Inductive load	-	60	-	ns
Turn-On Rise Time	t_r		-	72	-	ns
Turn-Off Delay Time	$t_{d(off)}$		-	220	-	ns
Turn-Off Fall Time	t_f		-	250	-	ns
Turn-on energy	E_{on}		-	2.72	-	mJ
Turn-off energy	E_{off}		-	6.28	-	mJ
Body Diode Characteristics						
Reverse Recovery Time	t_{rr}	$V_R=400V, I_F=25A,$ $di/dt=500A/us$	-	300	-	ns
Reverse Recovery Charge	Q_{rr}		-	5.1	-	μC
Peak Reverse Recovery Current	I_{rrm}		-	34	-	A







■ Characteristics Curves

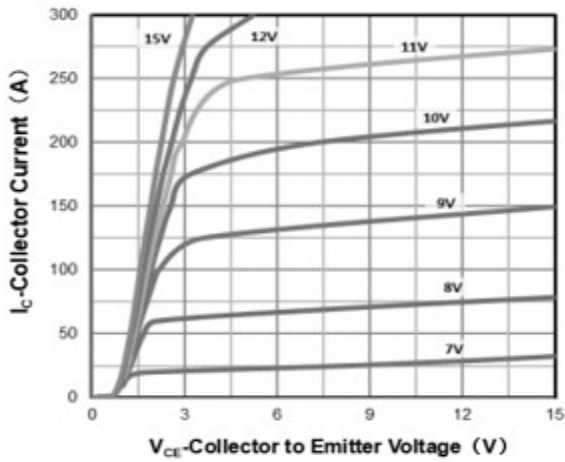


Output Characterisics

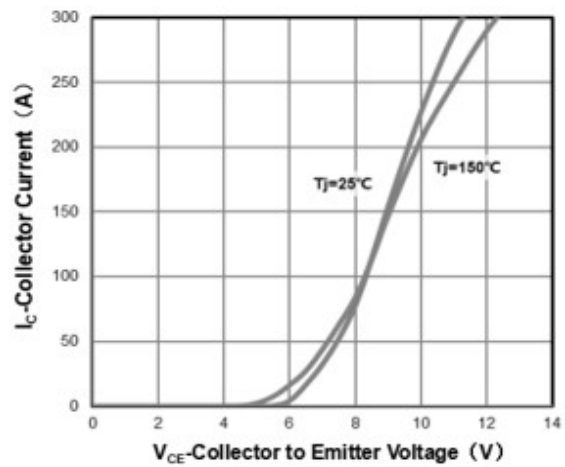


Transfer Characterisics

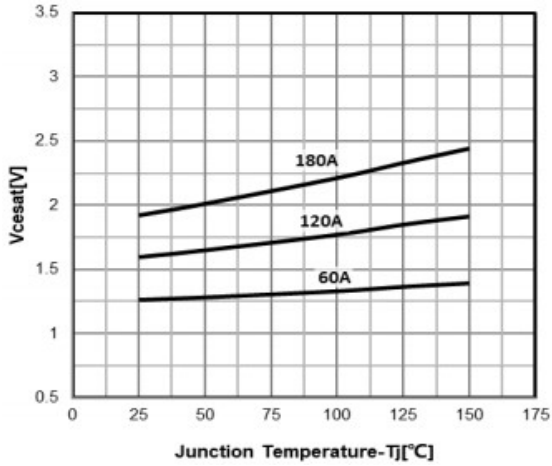


Typical collector-emitter saturation voltage as a function of junction temperature

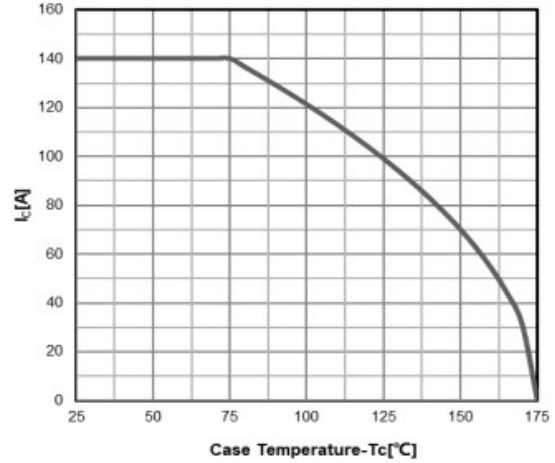

Collector current as a function of Case temperature

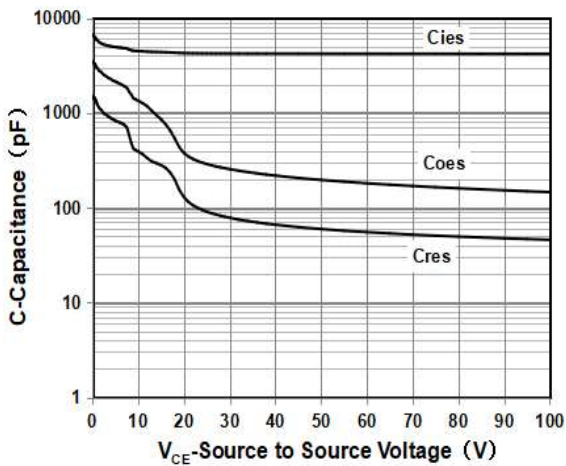


Capacitance

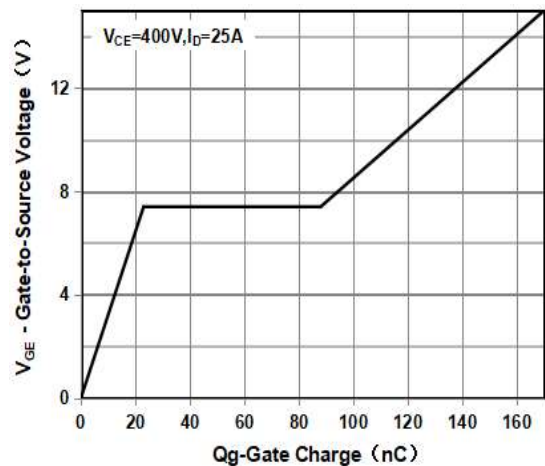


Typical gate charge



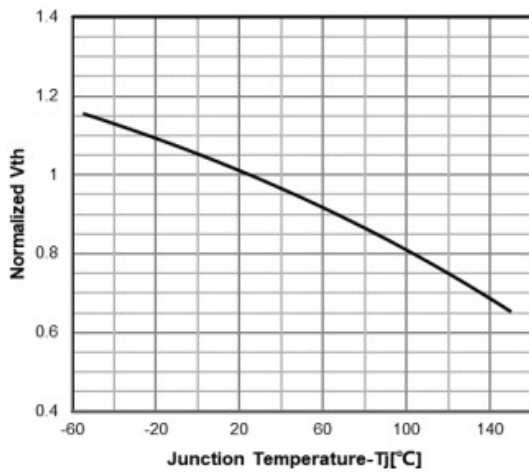

Gate-emitter threshold voltage as a function of junction temperature

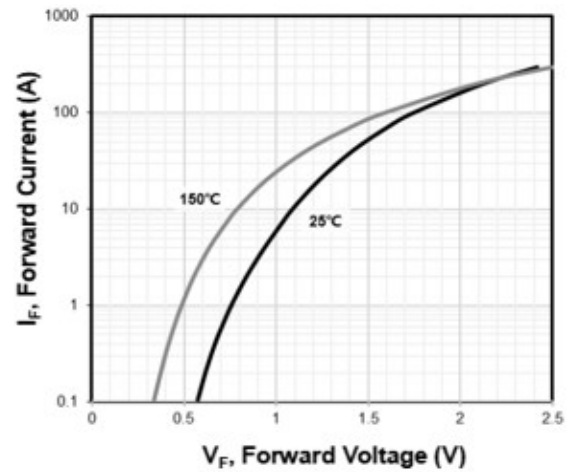

Typ. diode forward current as a function of forward voltage

Note : The above characteristics curves are presented for reference only and not guaranteed by production test, unless otherwise noted.





TO-247L Package Dimensions

Unit: mm

Symbol	Min	Nom	Max	Symbol	Min	Nom	Max
A	4.80		5.20	E1	13.00		13.60
A1	2.20	2.40	2.60	E2	5.00		5.50
A2	1.85		2.15	E3	1.90		2.60
b	1.07		1.33	e		5.44	
b2	1.90		2.16	L	19.30		19.90
b4	2.90		3.20	L1	3.75	3.95	4.15
c	0.52		0.68	ΦP	3.40		3.80
D	20.70		21.30	ΦP1	7.00		7.40
D1	16.15		16.95	S	6.04	6.15	6.30
E	15.50		16.10				

