



6A 650V SiC Schottky Diode

■ Applications

- Switch Mode Power Supply
- Power Factor Correction
- Solar Inverter
- Uninterruptible Power Supply

■ Product Summary


V _{RRM}	650	V
I _F @T _c =150°C	6	A
V _{F,TYP} @T _c =25°C	1.5	V
V _{F,TYP} @T _c =175°C	1.9	V
Q _c	15	nC

■ Features

- No Reverse Recovery/ No Forward Recovery
- Temperature Independent Switching Behavior
- Positive Temperature Coefficient on V_F
- Fast Reverse Recovery
- High Surge Current Capability
- 100% UIS and RG Tested

■ Benefits

- Higher System Efficiency
- System Cost and Size Savings
- High Frequency Operation
- Higher System Reliability
- Reduced EMI

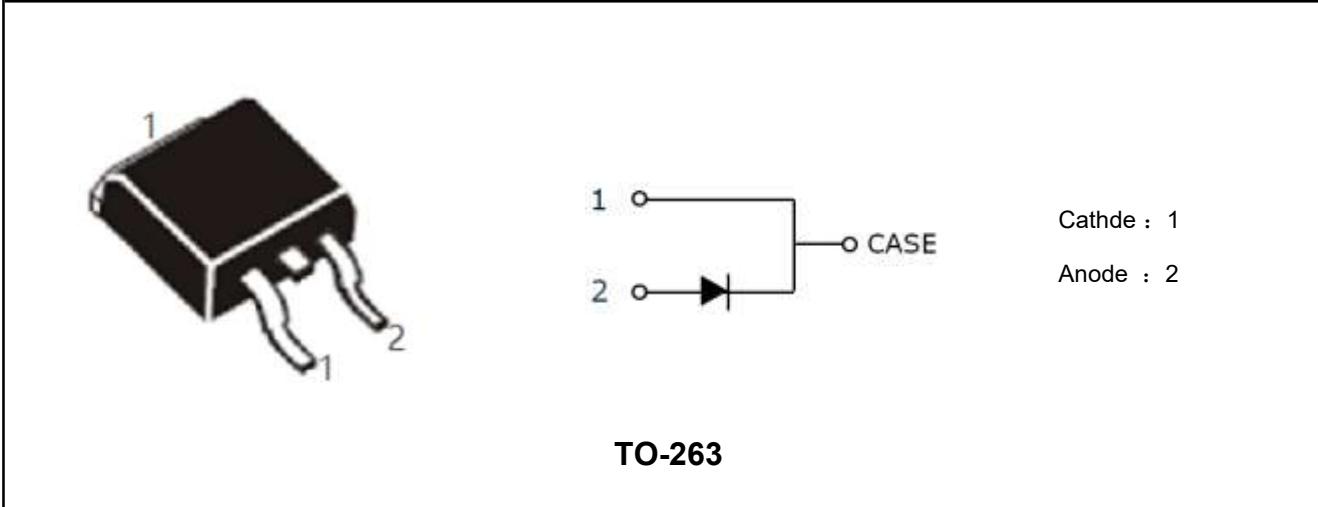

Marking	Package	Packaging	Min. package quantity
ML3S06C065	TO-263	Tube	1000
ML3S06C065	TO-263	Tape & Reel	800





■ Absolute Maximum Ratings (T_c=25°C unless otherwise noted)

Parameter	Symbol	Ratings	Unit
Peak Repetitive Reverse Voltage	V _{RRM}	650	V
Surge Peak Reverse Voltage	V _{RSM}	650	V
DC Peak Blocking Voltage	V _R	650	V
Continuous Forward Current T _c =150°C	I _F	6	A
Non-Repetitive Peak Forward Surge Current	I _{FSM}	55	A
Power Dissipation	P _D	75	W
Junction Temperature	T _j	175	°C
Storage Temperature	T _{stg}	-55-175	°C

■ Thermal Characteristics

Parameter	Symbol	Max	Unit
Maximum Junction-to-Case	R _{θJC}	2	°C/W
Maximum Junction-to-Ambient	R _{θJA}	60	°C/W


■ Electrical Characteristics (T_c=25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static Parameters						
DC Blocking Voltage	V _{DC}	I _R =100uA	650	-	-	V
Forward Voltage	V _F	I _F =6A	-	1.5	1.7	V
		I _F =6A, T _j =175°C	-	1.9	2.2	V
Reverse Current	I _R	V _R =650V	-	0.3	10	uA
		V _R =650V, T _j =175°C	-	15	100	uA
AC Parameters						
Total Capacitive Charge	Q _C	I _F = 6A, dI/dt=200A/μs, V _R =400V, T _j =25°C	-	15	-	nC
Total Capacitive	C	V _R =1V, f=1MHz	-	195	-	pF
		V _R =300V, f=1MHz	-	25	-	
		V _R =600V, f=1MHz	-	24	-	







■ Characteristics Curves

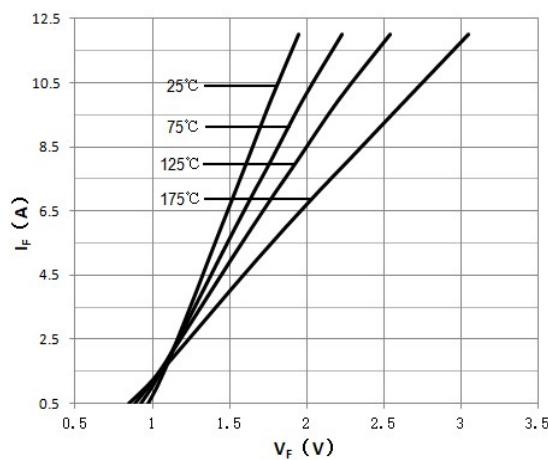


Forward Characteristics

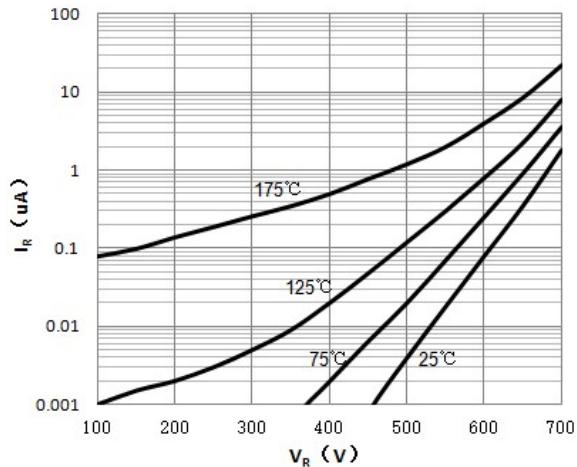


Reverse Characteristics

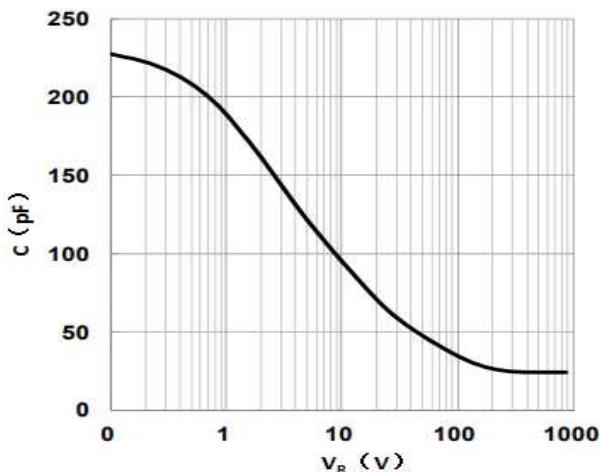

Capacitance

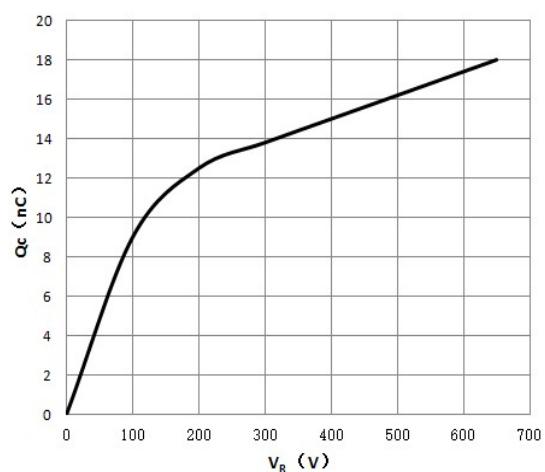

Recovery Charge vs. Reverse Voltage

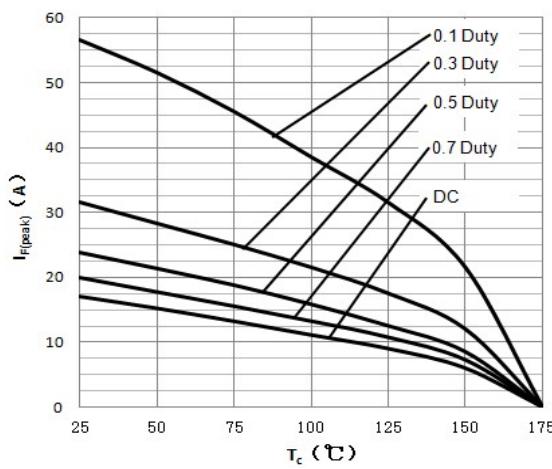

Current Derating





■ TO-263 Package Dimensions

Unit: mm

Symbol	Min	Nom	Max	Symbol	Min	Nom	Max
A	4.42		4.72	e1	2.44	2.54	2.64
B	1.22		1.4	e2	4.98		5.18
b	0.76		0.86	L1	14.7	15.1	15.5
b1	1.22		1.4	L2	2	2.3	2.6
b2	0.33		0.43	L3	1.5		2
C	1.22		1.35	K	-0.1		0.1
D	9.95		10.25	Y	8.51	8.61	8.71
E	8.99		9.29				

